

This attractive insulated flush mount window is available for applications where a large service opening is preferred. Popular for walk up applications and drive thru. Bi-parting doors slide open to the sides.

CHOOSE YOUR MODE OF OPERATION

◇ MANUAL OPEN / SELF CLOSE

Manually open both doors with one hand. Doors part from the center and open simultaneously on smooth overhead rollers. The door panels automatically close and self latch with a gravity feed when the operator lets go.

◇ MANUAL OPEN / ELECTRONIC RELEASE (MOER)

Electromagnetic "hold open" feature paired with a presence sensor offers the control of manual open with a gravity-fed close that won't release while interacting with customers. Hands free interaction that is easy to maintain.

GLAZING

- ◇ 3/4" Clear Insulated tempered glass.
- ◇ 3/4" Solarban 70XL Insulated Low-E tempered glass to maximize energy efficiency and staff comfort.



606-80 shown with clear anodized frame

SIZE

606-72—Window Frame Size: 72"W x 41"H
Service Opening: 30"W x 32.5"H
Rough Opening: 72.5"W x 41.5"H

606-80—Window Frame Size: 79 1/2"W x 43 1/2"H
Service Opening: 34"W x 34.75"H
Rough Opening: 80"W x 44"H


STANDARD FEATURES:

- ◇ Anodized aluminum extrusions and stainless steel combine to give you an attractive window that will not rust, pit or weather
- ◇ Fully assembled, pre-glazed and ready to install
- ◇ 3/4" Insulated Low E Solarban 70XL Tempered Glass
- ◇ Dark Bronze or Clear Anodized Aluminum Frame
- ◇ Latch so window cannot be opened from the outside, and thumb turn lock.
- ◇ Track free bottom sill
- ◇ One year parts & labor limited warranty
- ◇ On-staff tech support / stocked parts / nationwide network of service providers

OPTIONAL FEATURES

- ◇ Powder Coat Paint—Tiger Drylac

606-80

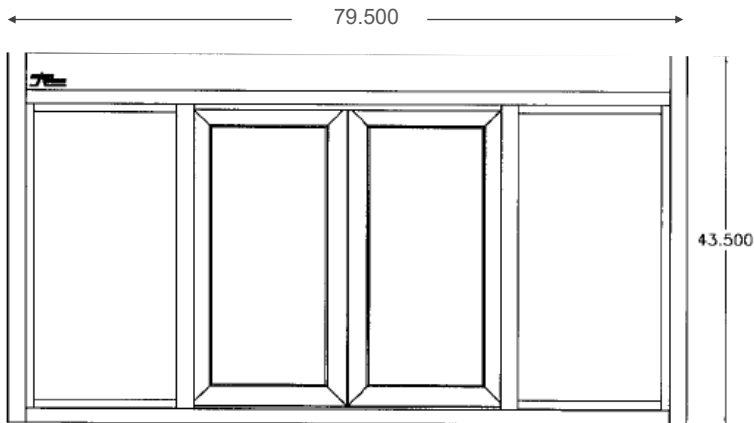

34"W X 34-3/4"H
SERVICE OPENING

606-80

Window Frame Size: 79.5"W x 43.75"H

Service Opening: 34"W x 34.75"H

Rough Opening: 80"W x 44"H

FRAME DEPTH: 4.5"

606-72

Window Frame Size: 72"W x 41"H

Service Opening: 30"W x 32.5"H

Rough Opening: 72.5"W x 41.5"H

FRAME DEPTH: 4.5"

All windows ship completely pre-assembled, fully glazed and ready to install.

Installation / Owners manual can be retrieved online:

www.ready-access.com

- ◇ Installation illustrations are for reference only. Construction conditions and local codes prevail.
- ◇ Must be installed level, square and plumb.
- ◇ Recommend approximately 36" from top of sill to interior finished floor (or per local code).
- ◇ Rough opening 1/2" larger than overall frame size recommended to allow 1/4" space all around for leveling.

ELECTRIC REQUIREMENTS

Manual Open / Self Close Window:

No Power Required

Manual Open / Electronic Release & Fully Automatic Electric:

120v single phase / 60Hz / 15 AMP dedicated circuit

Run power to header on fixed panel side

Window must be on a dedicated circuit

